



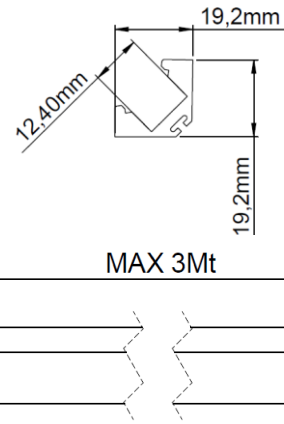

Brand by VRN s.n.c.
Viale Hanoi , 12 50065 Pontassieve (FI) ITALY
www.liplighting.com

LINEALED ANGLE45

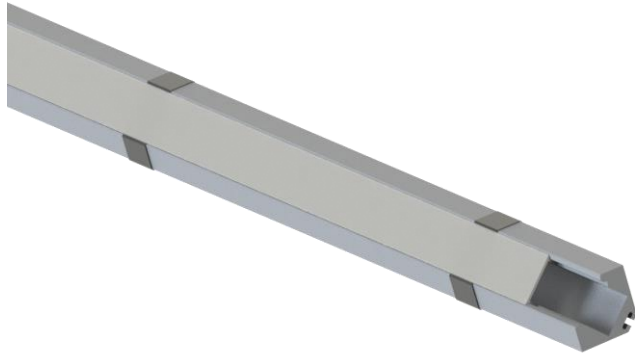

IP20



CARATTERISTICHE GENERALI

Luogo di installazione : Interno
 Tipo di installazione : Parete, Plafone, Sottopensili
 Tipo di montaggio : Staffa
 Tipo di emissione : Diretta
 Corpo : Estruso in alluminio
 Finitura : Alluminio Anodizzato, Custom
 Orientabilità : Fisso
 LIP Stripled installabile : Vedi tabella
 Contesti : Arredo interno ,Tagli di luce ,
 Illuminazione generale

Accessori - Accessories

ST000005



GENERAL FEATURES

Installation Location: Inside
 Type of installation: Wall, Ceiling, Under Cabinet
 Mounting Type: Bracket
 Emission type: Direct
 Body: Aluminium Extruded
 Finish : Anodized Aluminum , Custom
 Adjustment: Fixed
 LIP Stripled installable : See Table
 Contexts: Internal furniture, Cuts of light,
 General lighting

Codici profili – Profiles Codes

Codice - Code	Lunghezza – Length (mm)	Diffusore disponibile Diffuser available
ANG451MT-AA	1000	
ANG452MT-AA	2000	
ANG453MT-AA	3000	TRASPARENTE - TRANSPARENT OPALE – OPAL

Codice LIP Strip LIP Strip Code	Potenza Power (W/MT)	Ra	IP
SL000001-XX	10,1	90	20
SL000008-XX	14,4	90	20
SL000002-XX	19,2	90	20
SL000030-XX	24,1	90	20
SL000037-XX	10,1	90	66
SL000022-XX	14,4	90	66
SL000027-XX	19,2	90	66
SL000040-XX	24,1	90	66
SL000005-RGB	14,4	RGB	20
SL000009-RGB	14,4	RGB	66
SL000007-XX	19,2	RGBW	20
SL000024-XX	19,2	RGBW	66
SL000024-TW	19,2	TUNABLE WHITE	20

Inserire al posto di «XX» - Insert in place of "XX"
 HW (2700K) – WW (3000K) – NN (4000K)
 TUTTE LE STRIPLED FUNZIONANO A 24Vdc
 ALL STRIPLED OPERATE AT 24Vdc