




Brand by VRN s.n.c.
Viale Hanoi , 12 50065 Pontassieve (FI) ITALY
www.liplighting.com

LINEALED 15

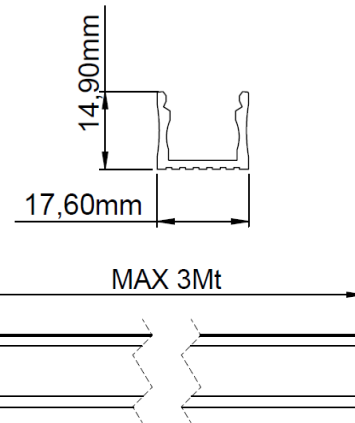


IP20




CARATTERISTICHE GENERALI

Luogo di installazione : Interno
Tipo di installazione : Parete, Plafone, Sottopensili
Tipo di montaggio : Staffa
Tipo di emissione : Diretta
Corpo : Estruso in alluminio
Finitura : Alluminio Anodizzato, Custom
Orientabilità : Fisso
LIP Stripled installabile : Vedi tabella
Contesti : Arredo interno ,Tagli di luce ,
Illuminazione generale

Accessori - Accessories



ST000030



GENERAL FEATURES

Installation Location: Inside
Type of installation: Wall, Ceiling, Under Cabinet
Mounting Type: Bracket
Emission type: Direct
Body: Aluminium Extruded
Finish : Anodized Aluminum , Custom
Adjustment: Fixed
LIP Stripled installable : See Table
Contexts: Internal furniture, Cuts of light,
General lighting

Codici profili – Profiles Codes

Codice - Code	Lunghezza – Length (mm)	Diffusore disponibile Diffuser available
SLM151MT-AA	1000	
SLM152MT-AA	2000	
SLM153MT-AA	3000	TRASPARENTE - TRANSPARENT OPALE – OPAL

Codice LIP Strip LIP Strip Code	Potenza Power (W/MT)	Ra	IP
SL000001-XX	10,1	90	20
SL000008-XX	14,4	90	20
SL000002-XX	19,2	90	20
SL000030-XX	24,1	90	20
SL000037-XX	10,1	90	66
SL000022-XX	14,4	90	66
SL000027-XX	19,2	90	66
SL000040-XX	24,1	90	66
SL000005-RGB	14,4	RGB	20
SL000009-RGB	14,4	RGB	66
SL000007-XX	19,2	RGBW	20
SL000024-XX	19,2	RGBW	66
SL000024-TW	19,2	TUNABLE WHITE	20

Inserire al posto di «XX» - Insert in place of "XX"
HW (2700K) – WW (3000K) – NN (4000K)
TUTTE LE STRIPLED FUNZIONANO A 24Vdc
ALL STRIPLED OPERATE AT 24Vdc